


# MATERIAL TEST DATA

TRP COMPOUND REFERENCE  
N°: F348 (page 1 of 2)

Polymer Type: Fluorocarbon Rubber

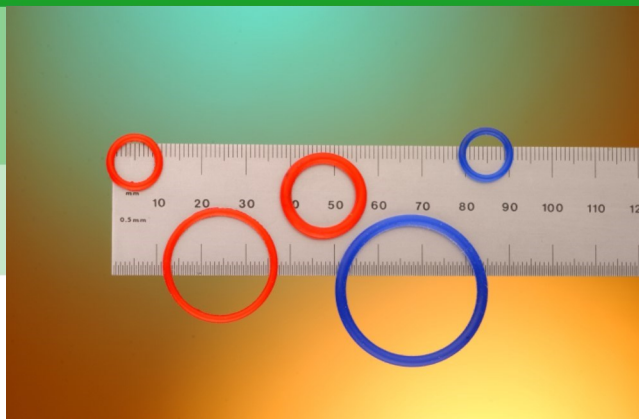


## Description

This white FDA material has been designed and formulated specifically for a wide range of industrial applications, particularly that of food production. Based on a peroxide cured FKM polymer, it gives excellent resistance to concentrated acids, aqueous chemicals and steam/water at elevated temperatures.

This material is tested to requirements of FDA 21 CFR 177-2600 (e) (f).

Service Temperatures:  
**-15°C (+5°F) to +200°C (+392°F).**

TYPICAL PHYSICAL PROPERTIES	Property	Typical Values	Test Standard
	Colour	White	
	Hardness (°IRHD)	75	ISO 48
	Tensile Strength (MPa)	15	ISO 37
	Modulus @ 100% (MPa)	5.01	ISO 37
	Elongation @ Break (%)	303	ISO 37
	Tear Strength (N/mm)	27.5	ISO 34
	Specific Gravity (g/cm <sup>3</sup> )	2.36	ISO 2781

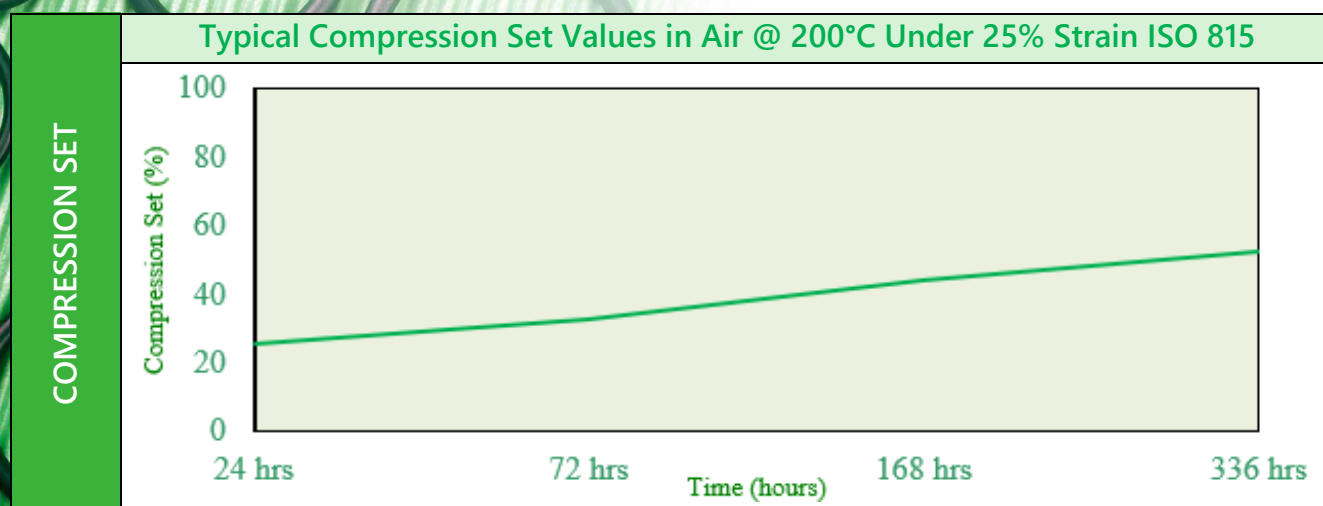

H I G H P E R F O R M A N C E E L A S T O M E R S

# MATERIAL TEST DATA

TRP COMPOUND REFERENCE N°: F348 (page 2 of 2)

Polymer Type: Fluorocarbon Rubber

AIR-AGEING	Property (after 168 hours @ 200°C)	Typical Values	Test Standard
	Hardness Change (°IRHD)	+4	ISO 188
	Tensile Change (%)	+35	ISO 188
	Elongation Change (%)	-8	ISO 188
	Property (after 336 hours @ 200°C)	Typical Values	Test Standard
	Hardness Change (°IRHD)	+4	ISO 188
	Tensile Change (%)	+41	ISO 188
Elongation Change (%)	-3	ISO 188	

H I G H P E R F O R M A N C E E L A S T O M E R S

The properties given on this data sheet is derived from tests carried out by TRP Polymer Solutions Ltd. They should not be regarded as specifications, but only as typical properties of the material described. It is intended for use by persons having technical skills and understanding of the seal and gasket design. Since the conditions of use are outside our control, nor have we designed the product shape, we can make no warranties, express or implied and assume no liability in connection with any use of this information.

Data Sheet	Page	Issue Date	Issue No.	Issue By
MD367	2 OF 2	14.06.2021	1	CC